


FLUSH NUTS

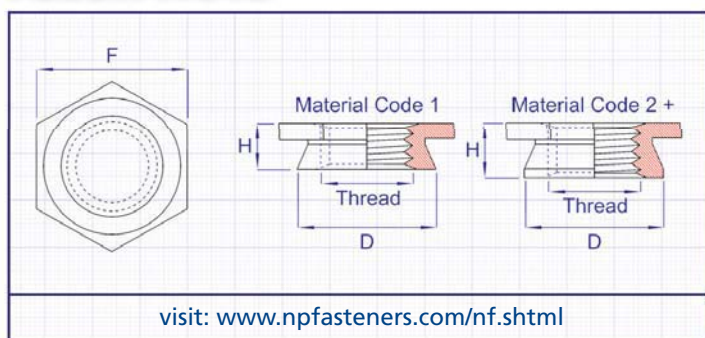

SPECIFICATION

*TO SPECIAL ORDER

Thread & Pitch	Material Code	D Max	F ± 0.2	H Max	Min. Rec. Sheet Thickness	Hole Size + 0.08 - 0.00	Min. C/L To edge of panel
M2.5 x 0.45 *	1 2	4.35	4.8	1.5 2.3	1.5 2.4	4.4	6.0
M3 x 0.5	1 2	4.35	4.8	1.5 2.3	1.5 2.4	4.4	6.0
Alternative M3 x 0.5	1 2	5.35	6.4	1.5 2.3	1.5 2.4	5.4	6.5
M3.5 x 0.6*	1 2	5.35	6.4	1.5 2.3	1.5 2.4	5.4	6.5
M4 x 0.7	1 2	7.35	7.9	1.5 2.3	1.5 2.4	7.4	7.2
M5 x 0.8	1 2	7.85	8.7	1.5 2.3	1.5 2.4	7.9	8.0
M6 x 1.0 *	3	8.70	9.5	3.1	3.2	8.75	8.8

INFORMATION

MATERIALS

300 Series Stainless Steel (A2).

NOTES

Stainless Steel Parts are suitable for use in sheets with a maximum hardness of 70 HRB. (Stainless Steel parts will not usually install successfully in Stainless Sheet).


PART NUMBER EXAMPLES

Type / Thread / Material Code / Finish =

NF - M3 - 1 - A2

(Flush Nut, M3, Mat Code 1, Stainless)

MINIATURE CLINCH NUTS

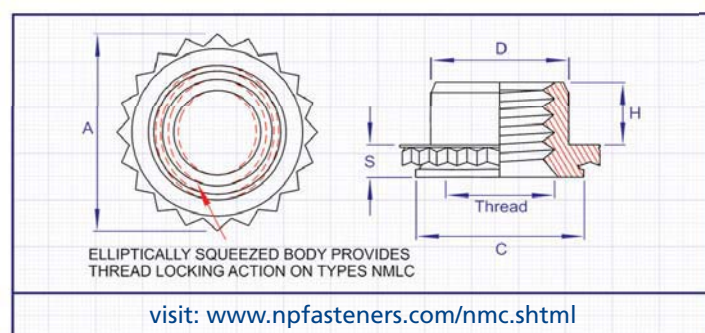

SPECIFICATION

*TO SPECIAL ORDER

Thread & Pitch	Material Code	Hole Size + 0.08	Recommend Panel Thickness	S Max	C - 0.13	D Max	A ± 0.13	H + 0.4	Min Dist C/L to edge
M3 x 0.5	1 2	4.4	0.99 - 1.14 1.50 - 1.78	1.02 1.53	4.34	3.96	4.88	1.90	3.6
M4 x 0.7	1 2	7.4	0.99 - 1.14 1.50 - 1.78	1.02 1.53	7.34	5.23	8.17	2.55	5.2
M5 x 0.8	1 2	7.4	0.99 - 1.14 1.50 - 1.78	1.02 1.53	7.34	6.48	8.17	3.05	5.2
M6 x 1.0*	1	8.75	1.50 - 1.78	1.53	8.71	7.72	9.74	3.30	7.1

INFORMATION

MATERIALS

300 Series Stainless Steel (A2).

FINISHES

Type NMC Passivated. Type NMLC Dry Film Lubricant (MD).

NOTES

Parts are suitable for use in sheets with a maximum hardness of 70 HRB.

PART NUMBER EXAMPLES

Type / Thread / Material Code / Finish =

NMC - M4 - 1 - A2

(Miniature Clinch Nut, M4, 0.99-1.14 Panel, Stainless)

For detailed installation guides and performance data visit www.npfasteners.com